


UP

Universal Path



Universal Path

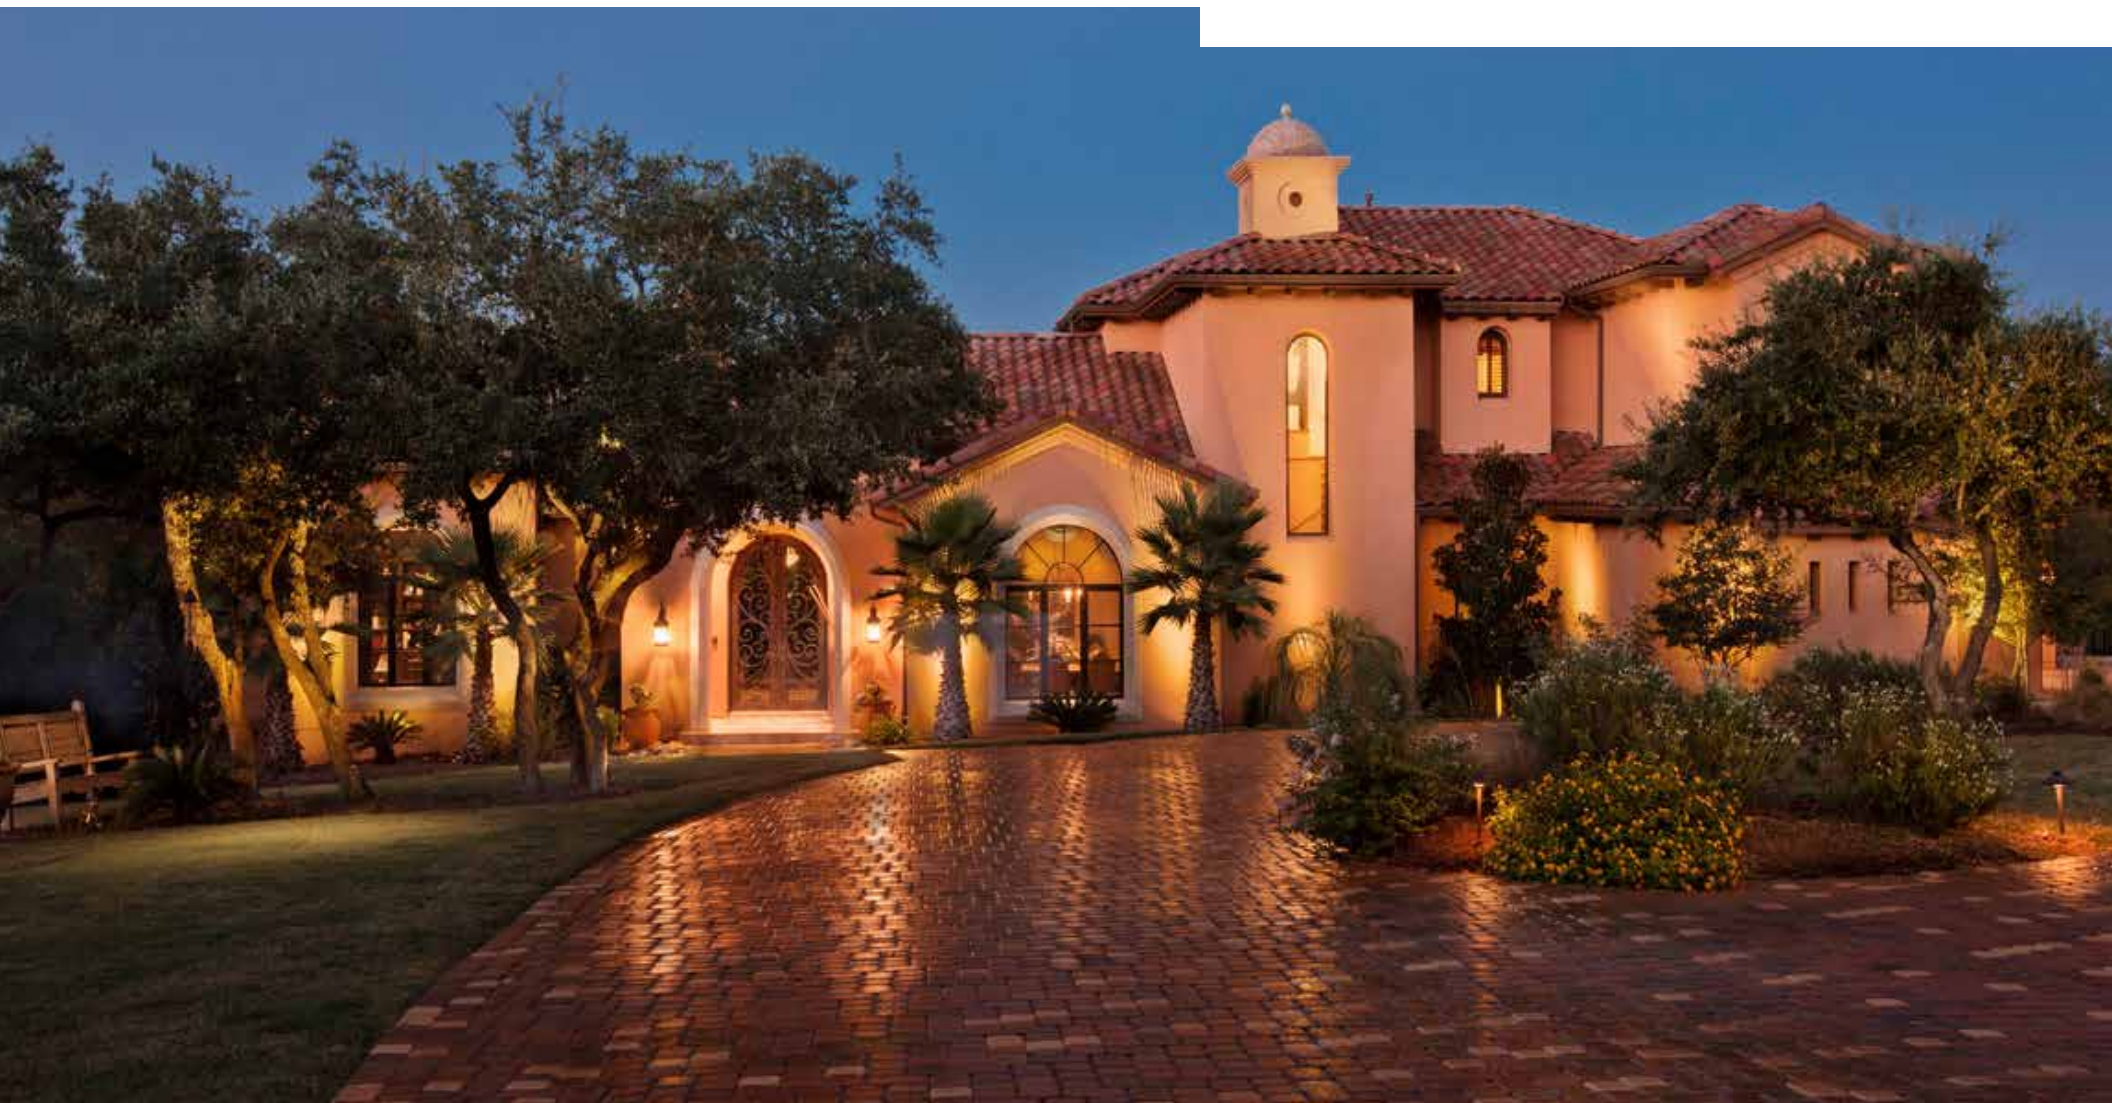

Universal Shade

US1301BK/BZ

MATERIAL / FEATURES

- Heavy duty cast aluminum
- Powder coated reflective white under shade
- Industrial grade hub assembly includes:
 - Rugged O ring seal for added moisture protection
 - Frosted plastic lens
- Design ensures shades are always level on posts
- Weather resistant powder coat finish - aluminum
 - (BK) Black - US1301BK
 - (BZ) Bronze - US1301BZ
- Universal Post (UP) and lamp required (not included - see options)
 - UP1112BK - 12" Universal Post Black
 - UP1112BZ - 12" Universal Post Bronze
 - UP1115BK - 15" Universal Post Black
 - UP1115BZ - 15" Universal Post Bronze
 - UP1118BK - 18" Universal Post Black
 - UP1118BZ - 18" Universal Post Bronze
- Fixture - 10 year warranty

ELECTRICAL

- 12 volt fixture
- 3' - #18/2 direct bury landscape lighting wire
- HI-temp ceramic socket w/nickel contacts, stainless steel springs, and Teflon jacketed wire leads
- T3 35 W Max G4 base lamp required (not included)
- Low voltage transformer required (not included)
- Wire connectors required (not included)
- C ETL listed and approved

LED LAMP OPTIONS

- LV1-T3
- LV2-T3
- LV3-T3

DIMENSIONS

- 3.5" W x 3.525" H



US1301BK



US1301BZ



LV1-T3



LV2-T3



LV3-T3

Universal Path

UPL1301BK/BZ-12LV2T3

KITTED FIXTURE

PRODUCT DESCRIPTION

- The UPL1301BK-12LV2T3 includes:
 - US13001BK cast aluminum universal shade
 - UP112BK 12" extruded aluminum universal post
 - GS1) ABS ground stake
 - LV2-T3-27K LED lamp
- The UPL1301BZ-12LV2T3 includes:
 - US1301BZ cast bronze universal shade
 - UP1112BZ 12" extruded bronze universal post
 - (GS1) ABS ground stake
 - LV2-T3 LED lamp
- Fixture - 10 year warranty
- LED lamp - 5 year warranty

LED LAMP INCLUDED

- LV2-T3-27K
- 9-15 V AC/DC
- T3 BI pin lamp
- IP67 rated
- Silica gel filled
- 35 x 35 SMD chipset
- 2700K
- 180 Lumens
- C ETL listed and approved
- FCC certified

DIMENSIONS

- 3.5" W x 3.525" H



US1301BZ



LV2-T3

Universal Shade

US1319BK/BZ

MATERIAL / FEATURES

- Heavy duty cast aluminum
- Powder coated reflective white under shade
- Industrial grade hub assembly includes:
 - Rugged O ring seal for added moisture protection
 - Frosted plastic lens
- Design ensures shades are always level on posts
- Weather resistant powder coat finish - aluminum
 - (BK) Black - US1319BK
 - (BZ) Bronze - US1319BZ
- Universal Post (UP) and lamp required (not included - see options)
 - UP1112BK - 12" Universal Post Black
 - UP1112BZ - 12" Universal Post Bronze
 - UP1115BK - 15" Universal Post Black
 - UP1115BZ - 15" Universal Post Bronze
 - UP1118BK - 18" Universal Post Black
 - UP1118BZ - 18" Universal Post Bronze
- Fixture - 10 year warranty

ELECTRICAL

- 12 volt fixture
- 3' - #18/2 direct bury landscape lighting wire
- HI-temp ceramic socket w/nickel contacts, stainless steel springs, and Teflon jacketed wire leads
- T3 35 W Max G4 base lamp required (not included)
- Low voltage transformer required (not included)
- Wire connectors required (not included)
- C ETL listed and approved

LED LAMP OPTIONS

- LV1-T3
- LV2-T3
- LV3-T3

DIMENSIONS

- 6.25" W x 3.5" H



US1319BK



US1319BZ



Intertek



LV1-T3



LV2-T3



LV3-T3

Universal Path

UPL1319BK/BZ-15LV2T3

KITTED FIXTURE

PRODUCT DESCRIPTION

- The UPL1319BK-15LV2T3 includes:
 - US1319BK cast bronze universal shade
 - UP1115BK 15" extruded bronze universal post
 - GS1) ABS ground stake
 - LV2-T3 LED lamp
- The UPL1319BZ-15LV2T3 includes:
 - US1319BZ cast bronze universal shade
 - UP1115BZ 15" extruded bronze universal post
 - (GS1) ABS ground stake
 - LV2-T3 LED lamp
- Fixture - 10 year warranty
- LED lamp - 5 year warranty

LED LAMP INCLUDED

- LV2-T3-27K
- 9-15 V AC/DC
- T3 BI pin lamp
- IP67 rated
- Silica gel filled
- 35 x 35 SMD chipset
- 2700K
- 180 Lumens
- C ETL listed and approved
- FCC certified

DIMENSIONS

- 6.25" W x 3.5" H



US1319BZ



LV2-T3

Universal Shade

US1403BK/BZ

MATERIAL / FEATURES

- Heavy duty cast aluminum
- Powder coated reflective white under shade
- Industrial grade hub assembly includes:
 - Rugged O ring seal for added moisture protection
 - Frosted plastic lens
- Design ensures shades are always level on posts
- Weather resistant powder coat finish - aluminum
 - (BK) Black - US1403BK
 - (BZ) Bronze - US1403BZ
- Universal Post (UP) and lamp required (not included - see options)
 - UP1112BK - 12" Universal Post Black
 - UP1112BZ - 12" Universal Post Bronze
 - UP1115BK - 15" Universal Post Black
 - UP1115BZ - 15" Universal Post Bronze
 - UP1118BK - 18" Universal Post Black
 - UP1118BZ - 18" Universal Post Bronze
- Fixture - 10 year warranty

ELECTRICAL

- 12 volt fixture
- 3' - #18/2 direct bury landscape lighting wire
- HI-temp ceramic socket w/nickel contacts, stainless steel springs, and Teflon jacketed wire leads
- T3 35 W Max G4 base lamp required (not included)
- Low voltage transformer required (not included)
- Wire connectors required (not included)
- C ETL listed and approved

LED LAMP OPTIONS

- LV1-T3
- LV2-T3
- LV3-T3

DIMENSIONS

- 7.875" W x 3.5" H



US1403BK



US1403BZ



LV1-T3



LV2-T3



LV3-T3

Universal Path

UPL1403BK/BZ-15LV2T3

KITTED FIXTURE

PRODUCT DESCRIPTION

- The UPL1403BK-15LV2T3 includes:
 - US1403BK cast bronze universal shade
 - UP1115BK 15" extruded bronze universal post
 - GS1) ABS ground stake
 - LV2-T3 LED lamp
- The UPL1403BZ-15LV2T3 includes:
 - US1403BZ cast bronze universal shade
 - UP1115BZ 15" extruded bronze universal post(GS1) ABS ground stake
 - LV2-T3 LED lamp
- Fixture - 10 year warranty
- LED lamp - 5 year warranty

LED LAMP INCLUDED

- LV2-T3-27K
- 9-15 V AC/DC
- T3 BI pin lamp
- IP67 rated
- Silica gel filled
- 35 x 35 SMD chipset
- 2700K
- 180 Lumens
- C ETL listed and approved
- FCC certified

DIMENSIONS

- 7.875" W x 3.5" H



US1403BZ



LV2-T3-27K

Universal Shade

US1607BK/BZ

MATERIAL / FEATURES

- Heavy duty cast aluminum
- Powder coated reflective white under shade
- Industrial grade hub assembly includes:
 - Rugged O ring seal for added moisture protection
 - Frosted plastic lens
- Design ensures shades are always level on posts
- Weather resistant powder coat finish - aluminum
 - (BK) Black - US1607BK
 - (BZ) Bronze - US1607BZ
- Universal Post (UP) and lamp required (not included - see options)
- UP1112BK - 12" Universal Post Black
 - UP1112BZ - 12" Universal Post Bronze
- UP1115BK - 15" Universal Post Black
 - UP1115BZ - 15" Universal Post Bronze
- UP1118BK - 18" Universal Post Black
 - UP1118BZ - 18" Universal Post Bronze
- Fixture - 10 year warranty

ELECTRICAL

- 12 volt fixture
- 3' - #18/2 direct bury landscape lighting wire
- HI-temp ceramic socket w/nickel contacts, stainless steel springs, and Teflon jacketed wire leads
- T3 35 W Max G4 base lamp required (not included)
- Low voltage transformer required (not included)
- Wire connectors required (not included)
- C ETL listed and approved

LED LAMP OPTIONS

- LV1-T3
- LV2-T3
- LV3-T3

DIMENSIONS

- 6" W x 2.375" H



US1607BK



US1607BZ



LV1-T3



LV2-T3



LV3-T3

Universal Path

UPL1607BK/BZ-15LV2T3

KITTED FIXTURE

PRODUCT DESCRIPTION

- The UPL1607BK-15LV2T3 includes:
 - US1607BK cast bronze universal shade
 - UP1115BK 15" extruded bronze universal post
 - (GS1) ABS ground stake
 - LV2-T3 LED lamp
- The UPL1607BZ-15LV2T3 includes:
 - US1607BZ cast bronze universal shade
 - UP1115BZ 15" extruded bronze universal post
 - (GS1) ABS ground stake
 - LV2-T3 LED lamp
- Fixture - 10 year warranty
- LED lamp - 5 year warranty

LED LAMP INCLUDED

- LV2-T3-27K
- 9-15 V AC/DC
- T3 BI pin lamp
- IP67 rated
- Silica gel filled
- 35 x 35 SMD chipset
- 2700K
- 180 Lumens
- C ETL listed and approved
- FCC certified

DIMENSIONS

- 6" W x 2.375" H



US1607BZ



LV2-T3-27K

Universal Shade

US1609BK/BZ

MATERIAL / FEATURES

- Heavy duty cast aluminum
- Powder coated reflective white under shade
- Industrial grade hub assembly includes:
 - Rugged O ring seal for added moisture protection
 - Frosted plastic lens
- Design ensures shades are always level on posts
- Weather resistant powder coat finish - aluminum
 - (BK) Black - US1609BK
 - (BZ) Bronze - US1609BZ
- Universal Post (UP) and lamp required (not included - see options)
 - UP1112BK - 12" Universal Post Black
 - UP1112BZ - 12" Universal Post Bronze
 - UP1115BK - 15" Universal Post Black
 - UP1115BZ - 15" Universal Post Bronze
 - UP1118BK - 18" Universal Post Black
 - UP1118BZ - 18" Universal Post Bronze
- Fixture - 10 year warranty

ELECTRICAL

- 12 volt fixture
- 3' - #18/2 direct bury landscape lighting wire
- HI-temp ceramic socket w/nickel contacts, stainless steel springs, and Teflon jacketed wire leads
- T3 35 W Max G4 base lamp required (not included)
- Low voltage transformer required (not included)
- Wire connectors required (not included)
- C ETL listed and approved

LED LAMP OPTIONS

- LV1-T3
- LV2-T3
- LV3-T3

DIMENSIONS

- 8.5" W x 3" H



US1609BK



US1609BZ



LV1-T3



LV2-T3



LV3-T3

Universal Path

UPL1609BK/BZ-15LV2T3

KITTED FIXTURE

PRODUCT DESCRIPTION

- The UPL1609BK-18LV2T3 includes:
 - US1609BK cast bronze universal shade
 - UP1118BK 18" extruded bronze universal post
 - (GS3) ABS ground stake
 - LV2-T3 LED lamp
- The UPL1609BZ-18LV2T3 includes:
 - US1609BZ cast bronze universal shade
 - UP1118BZ 18" extruded bronze universal post
 - (GS3) ABS ground stake
 - LV2-T3 LED lamp
- Fixture - 10 year warranty
- LED lamp - 5 year warranty

LED LAMP INCLUDED

- LV2-T3-27K
- 9-15 V AC/DC
- T3 BI pin lamp
- IP67 rated
- Silica gel filled
- 35 x 35 SMD chipset
- 2700K
- 180 Lumens
- C ETL listed and approved
- FCC certified

DIMENSIONS

- 8.5" W x 3" H



US1609BZ



LV2-T3

Universal Shade

US2301WB/CB

MATERIAL / FEATURES

- Heavy duty cast brass
- Powder coated reflective white under shade
- Industrial grade hub assembly includes:
 - Rugged O ring seal for added moisture protection
 - Frosted plastic lens
- Design ensures shades are always level on posts
- (WB) Weathered Brass
 - WB Brass finish will patina / tarnish depending on environmental conditions
- (CB) Carbon Black
 - CB cast brass fixtures finished with a superior top quality Dupont polyester powder coating
- Universal post (UP) and lamp required (not included - see options)
 - UP2112WB/CB - 12" Universal Post - Weathered Brass/Carbon Black
 - UP2115WB/CB - 15" Universal Post - Weathered Brass/Carbon Black
 - UP2118WB/CB - 18" Universal Post - Weathered Brass/Carbon Black
 - UP2124WB/CB - 24" Universal Post - Weathered Brass/Carbon Black
- Fixture - lifetime warranty

ELECTRICAL

- 12 volt fixture
- 3' - #18/2 direct bury landscape lighting wire
- HI-temp ceramic socket w/nickel contacts, stainless steel springs, and Teflon jacketed wire leads
- T3 35 W Max G4 base lamp required (not included)
- Low voltage transformer required (not included)
- Wire connectors required (not included)
- C ETL listed and approved

LED LAMP OPTIONS

- LV1-T3
- LV2-T3
- LV3-T3

DIMENSIONS

- 3.5" W x 3.5" H



US2301WB



Intertek



US2301CB



LV1-T3



LV2-T3



LV3-T3

Universal Path

UPL2301WB-12LV2T3

KITTED FIXTURE

PRODUCT DESCRIPTION

- The UPL2301WB-12LV2T3 includes:
 - US2301WB cast brass universal shade
 - UP2112WB 12" extruded brass universal post
 - (GS1) ABS ground stake
 - LV2-T3 LED lamp
- Fixture - lifetime warranty
- LED lamp - 5 year warranty

LED LAMP INCLUDED

- LV2-T3-27K
- 9-15 V AC/DC
- T3 BI pin lamp
- IP67 rated
- Silica gel filled
- 35 x 35 SMD chipset
- 2700K
- 180 Lumens
- C ETL listed and approved
- FCC certified

DIMENSIONS

- 3.5" W x 3.5" H



US2301WB



LV2-T3

Universal Shade

US2319WB/CB

MATERIAL / FEATURES

- Heavy duty cast brass
- Powder coated reflective white under shade
- Industrial grade hub assembly includes:
 - Rugged O ring seal for added moisture protection
 - Frosted plastic lens
- Design ensures shades are always level on posts
- (WB) Weathered Brass
 - WB Brass finish will patina / tarnish depending on environmental conditions
- (CB) Carbon Black
 - CB cast brass fixtures finished with a superior top quality Dupont polyester powder coating
- Universal post (UP) and lamp required (not included - see options)
 - UP2112WB/CB - 12" Universal Post - Weathered Brass/Carbon Black
 - UP2115WB/CB - 15" Universal Post - Weathered Brass/Carbon Black
 - UP2118WB/CB - 18" Universal Post - Weathered Brass/Carbon Black
 - UP2124WB/CB - 24" Universal Post - Weathered Brass/Carbon Black
- Fixture - lifetime warranty

ELECTRICAL

- 12 volt fixture
- 3' - #18/2 direct bury landscape lighting wire
- HI-temp ceramic socket w/nickel contacts, stainless steel springs, and Teflon jacketed wire leads
- T3 35 W Max G4 base lamp required (not included)
- Low voltage transformer required (not included)
- Wire connectors required (not included)
- C ETL listed and approved

LED LAMP OPTIONS

- LV1-T3
- LV2-T3
- LV3-T3

DIMENSIONS

- 6.25" W x 3.5" H



US2319WB



Intertek



US2319CB



LV1-T3



LV2-T3



LV3-T3

Universal Path

UPL2319WB-15LV2T3

KITTED FIXTURE

PRODUCT DESCRIPTION

- The UPL2319WB-15LV2T3 includes:
 - US2319WB cast brass universal shade
 - UP2115WB 15" extruded brass universal post
 - (GS1) ABS ground stake
 - LV2-T3 LED Lamp
- Fixture - lifetime warranty
- LED lamp - 5 year warranty

LED LAMP INCLUDED

- LV2-T3-27K
- 9-15 V AC/DC
- T3 BI pin lamp
- IP67 rated
- Silica gel filled
- 35 x 35 SMD chipset
- 2700K
- 180 Lumens
- C ETL listed and approved
- FCC certified

DIMENSIONS

- 6.25" W x 3.5" H



US2319WB



LV2-T3

Universal Shade

US2403WB/CB

MATERIAL / FEATURES

- Heavy duty cast brass
- Powder coated reflective white under shade
- Industrial grade hub assembly includes:
 - Rugged O ring seal for added moisture protection
 - Frosted plastic lens
- Design ensures shades are always level on posts
- (WB) Weathered Brass
 - WB Brass finish will patina / tarnish depending on environmental conditions
- (CB) Carbon Black
 - CB cast brass fixtures finished with a superior top quality Dupont polyester powder coating
- Universal post (UP) and lamp required (not included - see options)
 - UP2112WB/CB - 12" Universal Post - Weathered Brass/Carbon Black
 - UP2115WB/CB - 15" Universal Post - Weathered Brass/Carbon Black
 - UP2118WB/CB - 18" Universal Post - Weathered Brass/Carbon Black
 - UP2124WB/CB - 24" Universal Post - Weathered Brass/Carbon Black
- Fixture - lifetime warranty

ELECTRICAL

- 12 volt fixture
- 3' - #18/2 direct bury landscape lighting wire
- HI-temp ceramic socket w/nickel contacts, stainless steel springs, and Teflon jacketed wire leads
- T3 35 W Max G4 base lamp required (not included)
- Low voltage transformer required (not included)
- Wire connectors required (not included)
- C ETL listed and approved

LED LAMP OPTIONS

- LV1-T3
- LV2-T3
- LV3-T3

DIMENSIONS

- 7.875" W x 3.5" H



US2403WB



US2403CB



LV1-T3



LV2-T3



LV3-T3

Universal Path

UPL2403WB-15LV2T3

KITTED FIXTURE

PRODUCT DESCRIPTION

- The UPL23403WB-15LV2T3 includes:
 - US23403WB cast brass universal shade
 - UP2115WB 15" extruded brass universal post
 - (GS1) ABS ground stake
 - LV2-T3 LED lamp
- Fixture - lifetime warranty
- LED lamp - 5 year warranty

LED LAMP INCLUDED

- LV2-T3-27K
- 9-15 V AC/DC
- T3 BI pin lamp
- IP67 rated
- Silica gel filled
- 35 x 35 SMD chipset
- 2700K
- 180 Lumens
- C ETL listed and approved
- FCC certified

DIMENSIONS

- 7.875" W x 3.5" H



US2403WB



LV2-T3

Universal Shade

US2607WB

MATERIAL / FEATURES

- Heavy duty cast brass
- Powder coated reflective white under shade
- Industrial grade hub assembly includes:
 - Rugged O ring seal for added moisture protection
 - Frosted plastic lens
- Design ensures shades are always level on posts
- (WB) Weathered Brass
 - WB Brass finish will patina / tarnish depending on environmental conditions
- Universal post (UP) and lamp required (not included - see options)
 - UP2112WB - 12" Universal Post
 - UP2115WB - 15" Universal Post
 - UP2118WB - 18" Universal Post
 - UP2124WB - 24" Universal Post
- Fixture - lifetime warranty

ELECTRICAL

- 12 volt fixture
- 3' - #18/2 direct bury landscape lighting wire
- HI-temp ceramic socket w/nickel contacts, stainless steel springs, and Teflon jacketed wire leads
- T3 35 W Max G4 base lamp required (not included)
- Low voltage transformer required (not included)
- Wire connectors required (not included)
- C ETL listed and approved

LED LAMP OPTIONS

- LV1-T3
- LV2-T3
- LV3-T3

DIMENSIONS

- 6" W x 2.375" H



US2607WB



Intertek



LV1-T3



LV2-T3



LV3-T3

Universal Path

UPL2607WB-15LV2T3

KITTED FIXTURE

PRODUCT DESCRIPTION

- The UPL2607WB-15LV2T3 includes:
 - US2607WB cast brass universal shade
 - UP2115WB 15" extruded brass universal post
 - LV2-T3 LED lamp
 - (GS1) ABS ground stake
- Fixture - lifetime warranty
- LED lamp - 5 year warranty

LED LAMP INCLUDED

- LV2-T3-27K
- 9-15 V AC/DC
- T3 BI pin lamp
- IP67 rated
- Silica gel filled
- 35 x 35 SMD chipset
- 2700K
- 180 Lumens
- C ETL listed and approved
- FCC certified

DIMENSIONS

- 6" W x 2.375" H



US2607WB



LV2-T3

Universal Shade

US2609WB

MATERIAL / FEATURES

- Heavy duty cast brass
- Powder coated reflective white under shade
- Industrial grade hub assembly includes:
 - Rugged O ring seal for added moisture protection
 - Frosted plastic lens
- Design ensures shades are always level on posts
- (WB) Weathered Brass
 - WB Brass finish will patina / tarnish depending on environmental conditions
- Universal post (UP) and lamp required (not included - see options)
 - UP2112WB - 12" Universal Post
 - UP2115WB - 15" Universal Post
 - UP2118WB - 18" Universal Post
 - UP2124WB - 24" Universal Post
- Fixture - lifetime warranty

ELECTRICAL

- 12 volt fixture
- 3' - #18/2 direct bury landscape lighting wire
- HI-temp ceramic socket w/nickel contacts, stainless steel springs, and Teflon jacketed wire leads
- T3 35 W Max G4 base lamp required (not included)
- Low voltage transformer required (not included)
- Wire connectors required (not included)
- C ETL listed and approved

LED LAMP OPTIONS

- LV1-T3
- LV2-T3
- LV3-T3

DIMENSIONS

- 8.5" W x 3" H



US2609WB



Intertek



LV1-T3



LV2-T3



LV3-T3

Universal Path

UPL2609WB-15LV2T3

KITTED FIXTURE

PRODUCT DESCRIPTION

- The UPL2609WB-18LV2T3 includes:
 - US2609WB cast brass universal shade
 - UP2118WB 18" extruded brass universal post
 - LV2-T3 LED lamp
 - (GS3) ABS ground stake
- Fixture - lifetime warranty
- LED lamp - 5 year warranty

LED LAMP INCLUDED

- LV2-T3-27K
- 9-15 V AC/DC
- T3 BI pin lamp
- IP67 rated
- Silica gel filled
- 35 x 35 SMD chipset
- 2700K
- 180 Lumens
- C ETL listed and approved
- FCC certified

DIMENSIONS

- 8.5" W x 3" H



US2609WB



LV2-T3

Universal Post

ALUMINUM

MATERIAL / FEATURES

- Heavy duty cast aluminum
- EPDM rubber bug plug prevents moisture/bugs from entering fixture
- Chevron O-ring for secure fit
- (GS1) ABS ground stake
- Weather resistant powder coat finish - aluminum
 - (BK) Black
 - (BZ) Bronze
- Universal Shade (US) and lamp required (not included - see options)
 - UP1112BK - 12" Universal Post - Black
 - UP1112BZ - 12" Universal Post - Bronze
 - UP1115BK - 15" Universal Post - Black
 - UP1115BZ - 15" Universal Post - Bronze
 - UP1118BK - 18" Universal Post - Black
 - UP1118BZ - 18" Universal Post - Bronze
- Fixture - 10 year warranty

ELECTRICAL

- 12 volt fixture
- 3' - #18/2 direct bury landscape lighting wire
- HI-temp ceramic socket w/nickel contacts, stainless steel springs, and Teflon jacketed wire leads
- T3 35 W Max G4 base lamp required (not included)
- Low voltage transformer required (not included)
- Wire connectors required (not included)
- C ETL listed and approved

LED LAMP OPTIONS

- LV1-T3
- LV2-T3
- LV3-T3

DIMENSIONS

- UP1112BK/BZ - 1"W x 12"H
- UP1115BK/BZ - 1"W x 15"H
- UP1118BK/BZ - 1"W x 18"H



UP1112BK



UP1115BK



UP1118BK



Intertek



UP1112BZ



UP1115BZ



UP1118BZ



LV1-T3



LV2-T3



LV3-T3

Universal Post

BRASS

MATERIAL / FEATURES

- Heavy duty cast brass
- EPDM rubber bug plug prevents moisture/bugs from entering fixture
- Chevron O-ring for secure fit
- (GS1) ABS ground stake
- (WB) Weathered Brass
 - WB Brass finish will patina / tarnish depending on environmental conditions
- (CB) Carbon Black
 - CB cast brass fixtures finished with a superior top quality Dupont polyester powder coating
- Universal Shade (US) and lamp required (not included - see options)
 - UP2112WB/CB - 12" Universal Post - Weathered Brass/Carbon Black
 - UP2115WB/CB - 15" Universal Post - Weathered Brass/Carbon Black
 - UP2118WB/CB - 18" Universal Post - Weathered Brass/Carbon Black
 - UP2124WB/CB - 24" Universal Post - Weathered Brass/Carbon Black
 - (GS3) ABS ground stake
- Fixture - lifetime warranty

ELECTRICAL

- 12 volt fixture
- 3' - #18/2 direct bury landscape lighting wire
- HI-temp ceramic socket w/nickel contacts, stainless steel springs, and Teflon jacketed wire leads
- T3 35 W Max G4 base lamp required (not included)
- Low voltage transformer required (not included)
- Wire connectors required (not included)
- C ETL listed and approved

LED LAMP OPTIONS

- LV1-T3
- LV2-T3
- LV3-T3

DIMENSIONS

- UP2112WB - 1" w X 12"H
- UP2115WB - 1" w X 15"H
- UP2118WB - 1" w X 18"H
- UP2124WB - 1" w X 24"H



LV1-T3



LV2-T3



LV3-T3



Intertek

